

# 3500/25 Enhanced Keyphasor Module

## Datasheet

Bently Nevada Machinery Condition Monitoring

141532 Rev. U



## Description

The 3500/25 Enhanced Keyphasor Module is a half-height, two-channel module used to provide Keyphasor signals to the monitor modules in a 3500 rack. The module receives input signals from proximity probes or magnetic pickups and converts the signals to digital Keyphasor signals that indicate when the Keyphasor mark on the shaft coincides with the Keyphasor transducer. The 3500 Machinery Protection System can accept up to four Keyphasor signals for normal configuration and up to eight Keyphasor signals in a paired configuration.



Keyphasor signal is a once-per-turn or multiple-event-per-turn pulse from a rotating shaft or gear used to provide a precise timing measurement. This allows 3500 monitor modules and external diagnostic equipment to measure shaft rotative speed and vector parameters such as 1X vibration amplitude and phase.

The Enhanced Keyphasor Module is an improved 3500 system module. It offers expanded Keyphasor signal processing capabilities over the previous design while maintaining complete downward-compatibility in terms of form, fit and function with existing Keyphasor modules for use in legacy systems. The Keyphasor module, PWA 125792-01, is completely replaced by the updated 149369-01 module.

When a system Keyphasor input is required for Triple Modular Redundant (TMR) applications, the 3500 system should employ two Keyphasor modules. In this configuration, the modules work in parallel to provide both a primary and secondary Keyphasor signal to the other modules in the rack.



A system with more than four Keyphasor inputs may use a paired configuration provided there are no more than four primary Keyphasor input signals. A paired configuration requires two consecutive monitoring positions in either the upper/lower or both half-slot positions. Four Keyphasor modules will accept four primary and four backup input channels and provide four output channels (one per module). A configuration of two paired and one non-paired (three Keyphasor modules total) is also possible. In such a configuration, the user may configure the one non-paired Keyphasor (order either two 2-channel or one 1-channel and one 2-channel option)

The Isolated Keyphasor I/O module is designed for applications where the Keyphasor signals are tied in parallel to multiple devices and require isolation from other systems, such as a control system. The Isolated I/O module was created specifically for Magnetic Pickup applications but is compatible with and will provide isolation for Proximitors\* applications as long as an external power supply is provided.

The intent of this I/O module was primarily to measure shaft speed and not phase. The module can provide phase measurements, but this I/O introduces a slightly higher phase shift than the Non-Isolated I/O version. Figure 1 shows the amount of phase shift that the Isolated I/O modules will add at different machine speeds.

Enhanced product features include generation of once-per-turn event signals from multi-event-per-turn inputs, field-upgradeable firmware, and asset management data reporting.

## Specifications

### Inputs

Power Consumption	3.2 Watts typical
Signal	Each Keyphasor Module accepts up to two transducer signals from proximity probe transducers or magnetic pickups. The input signal range is +0.8 V to -21.0 V (Nonisolated I/O modules) or +5V to -11V (Isolated I/O modules). Signals exceeding this range are limited internally by the module. Passive magnetic pickups require a shaft rotative speed greater than 200 rpm (3.3 Hz).
Input Impedance	21.8 k $\Omega$ minimum

### Signal Conditioning

Speed/ Frequency Signal Ranges	Input range of 1 to 1,200,000 cpm (0.017 to 20 kHz). Supports multiple events per revolution to a maximum of 20 kHz.  Output range of 1 to 99,999 cpm (0.017 to 1667 Hz)
Speed/ Frequency Signal Accuracy	Specified at +25°C (+77°F).
Non-processed Signals	0.017 to 100 Hz ... $\pm 1$ cpm 101 to 500 Hz ... $\pm 8$ cpm 501 to 20 kHz ... $\pm 1\%$ of cpm
Processed Signals	0.017 to 60 Hz ... $\pm 1$ cpm 61 to 150 Hz ... $\pm 8$ cpm 151 to 20 kHz ... $\pm 1\%$ of cpm

### Transducer Conditioning

Auto Threshold	Minimum signal amplitude for triggering is 2 volts peak to peak and minimum frequency is 120 rpm (2 Hz).
Manual Threshold	Use for any input above 0.017 Hz (1 rpm for 1 event per revolution). User-selectable from 0 to -20 volts dc. Minimum signal amplitude for triggering is 500 millivolts peak to peak.
Hysteresis	User-selectable from 0.2 to 2.5 Volts.

### Outputs

Buffered Keyphasor Signals	Two buffered Keyphasor outputs are available at the front of the rack via coaxial connectors. Two buffered Keyphasor outputs are also available at the back of the rack via Euro Style connectors.
Output Impedance	504 $\Omega$ maximum buffered output impedance.
Keyphasor Transducer Power Supply	-24 Vdc, 40 mA maximum per channel.

#### Front Panel LEDs

OK LED	Indicates when a fault has been detected in the Keyphasor Module.
TX/RX LED	Indicates when the Keyphasor Module is communicating with the Rack Interface Module (RIM).

## Environmental Limits

Operating Temperature	-30°C to +65°C (-22°F to +150°F) when used with Keyphasor I/O Module other than the Internal Barrier version. 0°C to +65°C (32°F to +150°F) when used with Keyphasor Internal Barrier I/O Module (Internal Termination).
Storage Temperature	-40°C to +85°C (-40°F to +185°F)
Humidity	95%, non-condensing

## Physical

### Main Module

Dimensions Height x Width x Depth)	119.9 mm x 24.4 mm x 256.5 mm (4.72 in x 0.96 in x 10.10 in).
Weight	0.34 kg (0.76 lbs.)

### I/O Module

Dimensions (Height x Width x Depth)	241.3 mm x 24.4 mm x 103.1 mm (9.50 in x 0.96 in x 4.06 in)
Weight	0.46 kg (1.01 lbs.).

## Rack Space Requirement

Main Module	1 half-height front slot  The half-height main modules require a special mounting adapter for mounting in the full-height slots. The user can place the main modules in any one of the 14 available slots. Each rack may have no more than two main modules, one in a top half-slot and one in a bottom half-slot.
I/O Modules	1 full-height rear slot

## Compliance and Certifications (Approvals Pending)

### FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

### EMC

European Community Directive:

EMC Directive 2014/30/EU

Standards:

EN 61000-6-2; Immunity for Industrial Environments  
EN 61000-6-4; Emissions for Industrial Environments

### Electrical Safety

European Community Directive:

LV Directive 2014/35/EU

Standards:

EN 61010-1

### RoHS

European Community Directive:

RoHS Directive 2011/65/EU

### Cyber Security

Designed to meet IEC 62443

### Maritime

DNV GL rules for classification – Ships, offshore units, and high speed and light

craft

ABS Rules for Condition of Classification, Part 1

- Steel Vessels Rules
- Offshore Units and Structures

### Functional Safety

SIL 2



## Hazardous Area Approvals

For the detailed listing of country and product specific approvals, refer to the *Approvals Quick Reference Guide* (108M1756) available from [Bently.com](http://Bently.com).

### cNRTLus

<p>When used with I/O module ordering options without internal barriers</p>	<p>Class I, Zone 2: AEx/Ex nA nC ic IIC T4 Gc;          Class I, Zone 2: AEx/Ex ec nC ic IIC T4 Gc;          Class I, Division 2, Groups A, B, C, and D;           T4 @ Ta= -20°C to +65°C (-4°F to +149°F)          When installed per drawing 149243 or 149244.</p>
<p>When used with I/O module ordering options with internal barriers</p>	<p>Class I, Zone 2: AEx/Ex nA nC ic [ia Ga] IIC T4 Gc;          Class I, Zone 2: AEx/Ex ec nC ic [ia Ga] IIC T4 Gc;          Class I, Division 2, Groups A, B, C, and D (W/ IS Output for Division 1)           T4 @ Ta= -20°C to +65°C (-4°F to +149°F)          When installed per drawing 138547.</p>

### ATEX/IECEx

<p>When used with I/O module ordering options without internal barriers</p>	<p style="text-align: center;"></p> <p>II 3 G           Ex nA nC ic IIC T4 Gc;          Ex ec nC ic IIC T4 Gc;           T4 @ Ta= -20°C to +65°C (-4°F to +149°F)          When installed per drawing 149243 or 149244.</p>
<p>When used with I/O module ordering options with internal barriers</p>	<p style="text-align: center;"></p> <p>II 3(1) G           Ex nA nC ic [ia Ga] IIC T4 Gc;          Ex ec nC ic [ia Ga] IIC T4 Gc;          T4 @ Ta= -20°C to +65°C (-4°F to +149°F)          When installed per drawing 138547.</p>

## Ordering Considerations

### General

- External Termination (ET) Blocks cannot be used with Internal Termination I/O modules.
- When ordering I/O Modules with External Terminations, the External Termination Blocks and Cables must be ordered separately.
- There are many technical considerations involved in using the expanded signal processing functions of the Enhanced Keyphasor Module. A qualified Bently Nevada sales representative should be consulted prior to specifying or ordering modules for such applications.

### Internal Barrier I/O Module



Consult the 3500 Internal Barrier specification sheet document (141495) if the Internal Barrier Option is selected.

## Ordering Information

For the detailed listing of country and product specific approvals, refer to the *Approvals Quick Reference Guide* (108M1756) available from [Bently.com](http://Bently.com).

## Enhanced Keyphasor Module

### 3500/25-AA-BB-CC

#### A: Number of channels

<b>01</b>	Single half-height 2-channel Keyphasor card (order for 2-channels)
<b>02</b>	Two half-height 2-channel Keyphasor cards (order for 4-Channels)

#### B: Type of I/O Module

<b>01</b>	I/O module with Internal Terminations
-----------	---------------------------------------

<b>02</b>	I/O module with External Terminations
<b>03</b>	Internal Barrier I/O with Internal Terminations
<b>04</b>	Isolated I/O module with Internal Terminations (Designed for use with Magnetic Pickups)
<b>05</b>	Isolated I/O module with External Terminations (Designed for use with Magnetic Pickups)

#### C: Agency Approval Option

<b>00</b>	Not required
<b>01</b>	cNRTLus (Class 1, Div 2)
<b>02</b>	ATEX/IECEX/CSA (Class 1 Zone 2)

## External Termination Blocks

128718-01	Keyphasor External Termination Block (Euro Style Connectors)
128726-01	Keyphasor External Termination Block (Terminal Strip Connectors)

## Cables

### 3500 Keyphasor (KPH) Signal to External Termination (ET) Block Cable

#### 129530-AAAA-BB

#### A: Cable Length


<b>0005</b>	5 feet (1.5 metres)
<b>0007</b>	7 feet (2.1 metres)
<b>0010</b>	10 feet (3 metres)
<b>0025</b>	25 feet (7.5 metres)
<b>0050</b>	50 feet (15 metres)
<b>0100</b>	100 feet (30.5 metres)

B: Assembly Instructions

<b>01</b>	Not assembled
<b>02</b>	Assembled

## Spares

149369-01	Enhanced Keyphasor Module
-----------	---------------------------

 This module may be ordered as a direct plug-in replacement for Keyphasor Module 125792-01.


125800-01	Keyphasor I/O Module (Internal Terminations)
126648-01	Keyphasor I/O Module (External Terminations)
125800-02	Isolated Keyphasor I/O Module (Internal Terminations) (Designed for use with Magnetic Pickups)
126648-02	Isolated Keyphasor I/O Module (External Terminations) (Designed for use with Magnetic Pickups)
135473-01	Keyphasor I/O Module (Internal Barriers and Internal Terminations.
04425545	Grounding Wrist Strap (single use)
00580438	Connector Header, Internal Termination, 4-Position, Green
166M2391	Connector Header, Push-in-Spring Type (alternative for PN 00580438)
00502133	Connector Header, Internal Termination, 12-Position, Blue
129770	Keyphasor Module User Guide
Half-height Blank Monitor Cover Kit	
131151-01	Half-height Blank Front Panel Cover (qty 1, includes screws)

## Half-height Card Adapter


125388-01	Half-height Chassis
125565-01	Card Guide
04300111	Assembly Screws (Order Qty. 3)



## Graphs and Figures

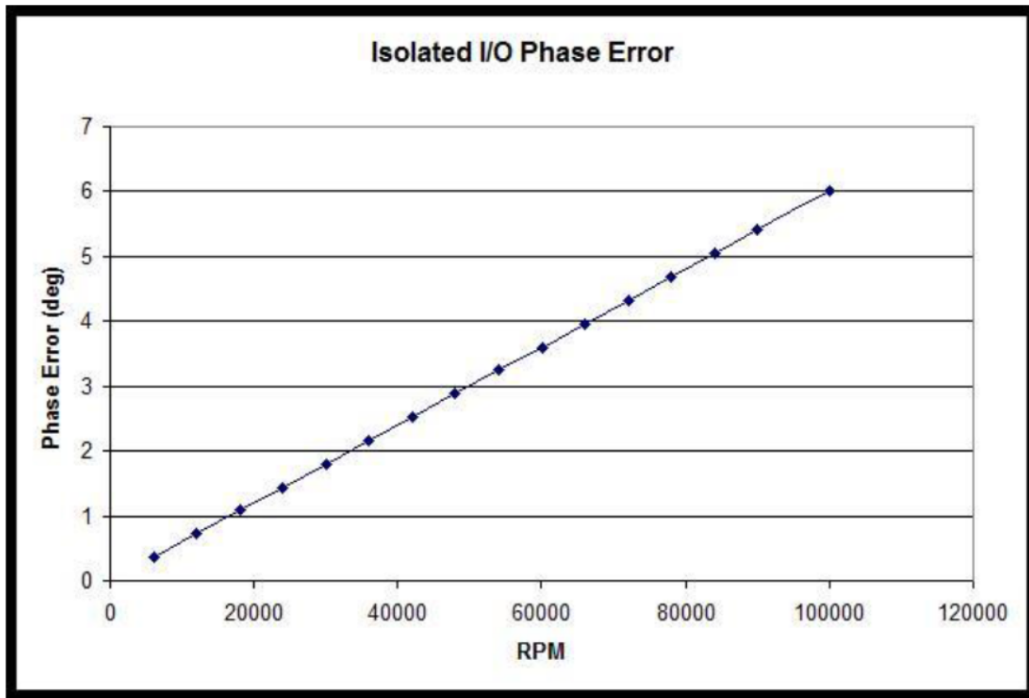

**Figure 1: Phase Error vs. Machine Speed**

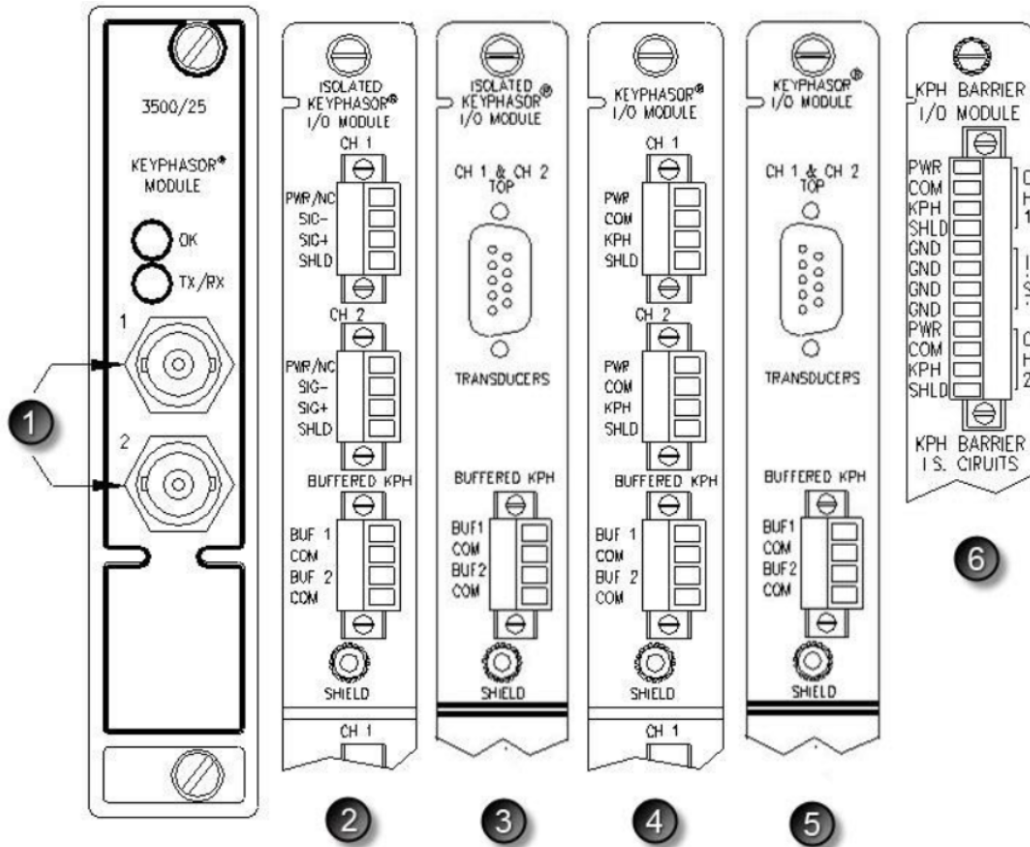

1. Buffered Transducer Outputs
2. I/O Module, Isolated Internal Termination
3. I/O Module, Isolated External Termination
4. I/O Module, Non-Isolated Internal Termination
5. I/O Module, Non-Isolated External Termination
6. Barrier I/O Module, Internal Termination

**Figure 2: Front and Rear View of 3500/25 Keyphasor module**

Copyright 2022 Baker Hughes Company. All rights reserved.



Bently Nevada, Keyphasor, M2, Proximitor and Orbit Logo are registered trademarks of Bently Nevada, a Baker Hughes business, in the United States and other countries. The Baker Hughes logo is a trademark of Baker Hughes Company. All other product and company names are trademarks of their respective holders. Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

Baker Hughes provides this information on an "as is" basis for general information purposes. Baker Hughes does not make any representation as to the accuracy or completeness of the information and makes no warranties of any kind, specific, implied or oral, to the fullest extent permissible by law, including those of merchantability and fitness for a particular purpose or use. Baker Hughes hereby disclaims any and all liability for any direct, indirect, consequential or special damages, claims for lost profits, or third party claims arising from the use of the information, whether a claim is asserted in contract, tort, or otherwise. Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Baker Hughes representative for the most current information.

The information contained in this document is the property of Baker Hughes and its affiliates; and is subject to change without prior notice. It is being supplied as a service to our customers and may not be altered or its content repackaged without the express written consent of Baker Hughes. This product or associated products may be covered by one or more patents. See [Bentley.com/legal](https://www.bentley.com/legal).

1631 Bently Parkway South, Minden, Nevada USA 89423  
Phone: 1.775.782.3611 (US) or [Bentley.com/support](https://www.bentley.com/support)  
[Bentley.com](https://www.bentley.com)